




0550 Machine levels

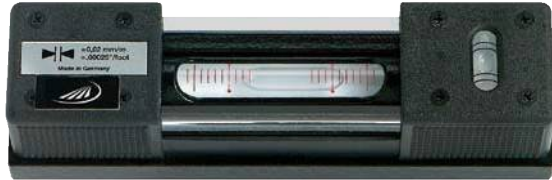

DIN 877

Model

- DIN 877
- V-groove in the base
- Longitudinal level grinded and graduated
- Transverse level
- Thermally insulated

Delivery

- Case

		Length mm	Order no.
Reading 0.02 mm/m			
		160	0550 021
		200	0550 022
		250	0550 023
		300	0550 024
Reading 0.1 mm/m			
		160	0550 101
		200	0550 102
		250	0550 103
		300	0550 104
Reading 0.3 mm/m			
		160	0550 131
		200	0550 132
		250	0550 133
		300	0550 134

0551 Crankpin levels



DIN 877

Model

- DIN 877
- With a longitudinal and a transverse level
- Longitudinal level grinded and graduated

Delivery

- Case

		Length mm	Order no.
Reading 0.04 mm/m			
		90	0551 002
		120	0551 003
Reading 0.1 mm/m			
		90	0551 012
		120	0551 013
Reading 0.2 mm/m			
		60	0551 021



0556 Frame levels



**DIN
877**



Model

- DIN 877
- V-grooves on 3 sides
- Longitudinal level
- Grinded and graduated
- Transverse level
- Thermally insulated

Delivery

- Case

Marked	Marked	Base dimensions mm	Order no.
		Reading 0.02 mm/m	
		150 x 150	0556 022
		200 x 200	0556 023
		300 x 300	0556 024
		Reading 0.1 mm/m	
		100 x 100	0556 101
		150 x 150	0556 102
		200 x 200	0556 103
		300 x 300	0556 104
		Reading 0.3 mm/m	
		100 x 100	0556 131
		150 x 150	0556 132
		200 x 200	0556 133
		300 x 300	0556 134

0560 Protractor level



Model

- Made of special steel
- With degree scale
- Flat base
- 1° to 0-90°
- Ideal for levelling, determining centre points and adjusting angles

Delivery

- Case

Marked	Marked	Base dimensions mm	Readings minutes	Order no.
		Reading 0.04 mm/m		
		200 x 200	6	0560 001

0563 Magnetic angle gauge



Model

- Centre punch
- Dial face 360°
- Magnetic 90° splayed base

Delivery

- Cardboard box

Marked	Marked	Order no.
		0563 001