

CABLE TIES

G series, PA6.6 Polyamide

Cable Ties in PA6.6

Type	L (mm)	A (mm)	Max. Bundle Ø (mm)	Min. Loop Tensile Strength (kg)	Quantity										
G450X4.8	450	4,8	116	22	100										
G450X4.8N			140												
G530X4.8	530	4,8	140	100											
G530X4.8N			140												
G150X7.6	150	7,6	33			100									
G150X7.6N			33												
G200X7.6	200	7,6	50				100								
G200X7.6N			50												
G250X7.6	250	7,6	65					100							
G250X7.6N			65												
G300X7.6	300	7,6	76						100						
G300X7.6N			76												
G370X7.6	370	7,6	102							100					
G370X7.6N			102												
G430X7.6	430	7,6	125								100				
G430X7.6N			125												
G530X7.6	530	7,6	140									100			
G530X7.6N			140												
G430X9.0	430	9,0	110										100		
G430X9.0N			110												
G530X9.0	530	9,0	140											100	
G530X9.0N			140												
G710X9.0	710	9,0	190												100
G710X9.0N			190												
G780X9.0	780	9,0	228		100										
G780X9.0N			228												
G830X9.0	830	9,0	239	100											
G830X9.0N			239												
G920X9.0	920	9,0	263			100									
G920X9.0N			263												
G1020X9.0	1020	9,0	295				100								
G1020X9.0N			295												
G1220X9.0	1220	9,0	365					100							
G1220X9.0N			365												
G230X12.6	230	12,6	50						100						
G230X12.6N			50												
G380X12.6	380	12,6	106							100					
G380X12.6N			106												
G480X12.6	480	12,6	120								100				
G480X12.6N			120												
G580X12.6	580	12,6	152									100			
G580X12.6N			152												
G730X12.6	730	12,6	204										100		
G730X12.6N			204												
G880X12.6	880	12,6	248											100	
G880X12.6N			248												
G1030X12.6	1030	12,6	295												100
G1030X12.6N			295												

Note: In Type, N = Black

Recommended tools are shown on page 228

The dimensions shown in the table must be considered as nominal. Cembre reserves the right to make changes without prior notice

G


PA 6.6



HF
HALOGEN
FREE



Angled tongue to facilitate easy introduction into the buckle

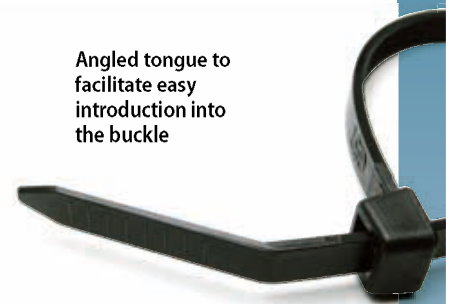

Rounded corners for increased safety



CABLE TIES

G series, PA6.6 Polyamide - V0 (UL94)

Cable Ties in PA6.6 - V0 (UL94)

Type	L (mm)	A (mm)	Max. Bundle Ø (mm)	Min. Loop Tensile Strength (kg)	Quantity	Minimum Order Qty
G90X2.4 V0	90	2,4	16	8	100	1000
G100X2.5/M V0	100		22			
G140X2.5/M V0	140	33				
G200X2.5/M V0	200	53				
G150X3.6 V0	150	3,6	35	18	100	1000
G200X4.8/M V0	200	4,8	50	22	1000	
G370X4.8 V0	370		102		100	
G430X4.8 V0	430	110	100			
G710X9.0 V0	710	9,0	190	80	100	100

Recommended tools are shown on page 228

The dimensions shown in the table must be considered as nominal. Cembre reserves the right to make changes without prior notice

G V0

PA 6.6



HF
HALOGEN
FREE

Same features as G series except: self-extinguishing V0 (UL 94)