

G

CABLE TIES

G series, PA6.6 Polyamide


PA 6.6



HF
HALOGEN
FREE



Material: PA6.6 Polyamide
Self-extinguishing V2 (UL 94)
Humidity absorption:
2,5% (at 50% relative humidity)
Operating temperature:
From -40°C to +85°C (continuous)
From -40°C to +120°C (short periods)
Resistant to:
oils, greases, oil products, chlorinated
solvents.
Colour: Natural or Black (Ral 2005)



Black ties have higher UV
resistance due to in-
creased carbon black
loading

Natural ties offer rapid
installation due to the
low friction co-
efficient of the ma-
terial

Cable Ties in PA6.6

Type	L (mm)	A (mm)	Max. Bundle Ø (mm)	Min. Loop Tensile Strength (kg)	Quantity	
G80X2.4	80	2,4	15	8	100	
G80X2.4N					1000	
G80X2.4/M			16		100	
G80X2.4N/M					1000	
G90X2.4	90	2,4	16		100	
G90X2.4N					1000	
G100X2.5			22		100	
G100X2.5N					1000	
G100X2.5/M	100	2,5	30	100		
G100X2.5N/M				1000		
G120X2.5			33	1000		
G120X2.5N				1000		
G140X2.5	140	2,5	33	100		
G140X2.5N				1000		
G140X2.5/M			40	1000		
G140X2.5N/M				1000		
G160X2.5	160	2,5	40	100		
G160X2.5N				1000		
G160X2.5/M			53	1000		
G160X2.5N/M				1000		
G200X2.5	200	2,5	53	100		
G200X2.5N				1000		
G200X2.5/M			65	1000		
G200X2.5N/M				1000		
G250X2.8	250	2,8	65	14	100	
G250X2.8N					1000	
G300X2.8			76		100	
G300X2.8N					1000	
G120X3.6	120	3,6	30		18	100
G120X3.6N						1000
G140X3.6			33			100
G140X3.6/M						1000
G140X3.6N/M	150	3,6	35	100		
G150X3.6				1000		
G180X3.6			44	100		
G180X3.6N				1000		
G200X3.6	200	3,6	53	100		
G200X3.6N				1000		
G200X3.6/M			65	1000		
G200X3.6N/M				1000		
G250X3.6	250	3,6	65	100		
G250X3.6N				1000		
G300X3.6			76	100		
G300X3.6N				1000		
G300X3.6/M	300	3,6	76	100		
G300X3.6N/M				1000		
G370X3.6			102	100		
G370X3.6N				1000		
G120X4.8	120	4,8	24	22	100	
G120X4.8N					1000	
G160X4.8			38		100	
G160X4.8N					1000	
G190X4.8	190	4,8	46		100	
G190X4.8N					1000	
G190X4.8/M			50		100	
G190X4.8N/M					1000	
G200X4.8	200	4,8	50	100		
G200X4.8N				1000		
G200X4.8/M			60	1000		
G200X4.8N/M				1000		
G250X4.8/M	250	4,8	60	22	100	
G250X4.8N/M					1000	
G250X4.8			60		100	
G250X4.8N					1000	
G280X4.8	280	4,8	70		22	100
G280X4.8N						1000
G300X4.8			76			100
G300X4.8N						1000
G370X4.8	370	4,8	102	22		100
G370X4.8N						1000
G390X4.8			105			100
G390X4.8N						1000
G430X4.8	430	4,8	110		22	100
G430X4.8N						1000

Minimum order: 1.000 pcs

Minimum order: 100 pcs

Note: In Type, N = Black

Recommended tools are shown on page 228

The dimensions shown in the table must be considered as nominal. Cembre reserves the right to make changes without prior notice

CABLE TIES

G series, PA6.6 Polyamide

Cable Ties in PA6.6

Type	L (mm)	A (mm)	Max. Bundle Ø (mm)	Min. Loop Tensile Strength (kg)	Quantity											
G450X4.8	450	4,8	116	22	100											
G450X4.8N			140													
G530X4.8	530	4,8	140	22		100										
G530X4.8N			140													
G150X7.6	150	7,6	33	55			100									
G150X7.6N			50													
G200X7.6	200	7,6	50	55				100								
G200X7.6N			65													
G250X7.6	250	7,6	65	55					100							
G250X7.6N			76													
G300X7.6	300	7,6	76	55						100						
G300X7.6N			102													
G370X7.6	370	7,6	102	55							100					
G370X7.6N			125													
G430X7.6	430	7,6	125	55								100				
G430X7.6N			140													
G530X7.6	530	7,6	140	55									100			
G530X7.6N			110													
G430X9.0	430	9,0	110	80										100		
G430X9.0N			140													
G530X9.0	530	9,0	140	80											100	
G530X9.0N			190													
G710X9.0	710	9,0	190	80												100
G710X9.0N			228													
G780X9.0	780	9,0	228	80	100											
G780X9.0N			239													
G830X9.0	830	9,0	239	80		100										
G830X9.0N			263													
G920X9.0	920	9,0	263	80			100									
G920X9.0N			295													
G1020X9.0	1020	9,0	295	80				100								
G1020X9.0N			365													
G1220X9.0	1220	9,0	365	80					100							
G1220X9.0N			50													
G230X12.6	230	12,6	50	115						100						
G230X12.6N			106													
G380X12.6	380	12,6	106	115							100					
G380X12.6N			120													
G480X12.6	480	12,6	120	115								100				
G480X12.6N			152													
G580X12.6	580	12,6	152	115									100			
G580X12.6N			204													
G730X12.6	730	12,6	204	115										100		
G730X12.6N			248													
G880X12.6	880	12,6	248	115											100	
G880X12.6N			295													
G1030X12.6	1030	12,6	295	115												100
G1030X12.6N																

Note: In Type, N = Black

Recommended tools are shown on page 228

The dimensions shown in the table must be considered as nominal. Cembre reserves the right to make changes without prior notice

G


PA 6.6



HF
HALOGEN
FREE



Angled tongue to facilitate easy introduction into the buckle

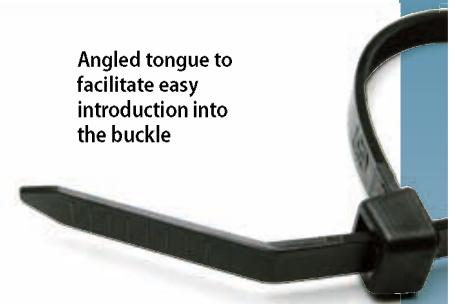

Rounded corners for increased safety



CABLE TIES

G series, PA6.6 Polyamide - V0 (UL94)

Cable Ties in PA6.6 - V0 (UL94)

Type	L (mm)	A (mm)	Max. Bundle Ø (mm)	Min. Loop Tensile Strength (kg)	Quantity	Minimum Order Qty
G90X2.4 V0	90	2,4	16	8	100	1000
G100X2.5/M V0	100	2,5	22		1000	
G140X2.5/M V0	140		33		1000	
G200X2.5/M V0	200		53		1000	
G150X3.6 V0	150	3,6	35	18	100	100
G200X4.8/M V0	200	4,8	50	22	1000	
G370X4.8 V0	370		102		100	
G430X4.8 V0	430		110		100	
G710X9.0 V0	710	9,0	190	80	100	100

Recommended tools are shown on page 228

The dimensions shown in the table must be considered as nominal. Cembre reserves the right to make changes without prior notice

G V0

PA 6.6



HF
HALOGEN
FREE

Same features as G series except: self-extinguishing V0 (UL 94)