


GR



Same features as G series.
Easy installation without tools.
Released by pressure on the tongue.
Suitable for temporary locking.

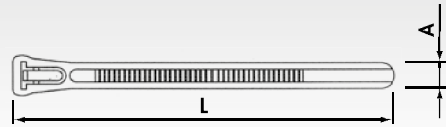

Releasable cable ties in PA6.6

Type	L (mm)	A (mm)	Max. Bundle Ø (mm)	Min. Loop Tensile Strength (kg)	Quantity
GR100X7.6N	100	7,6	20	22,2	100
GR120X7.6N	120		30		
GR150X7.6N	150		35		
GR200X7.6N	200		50		
GR250X7.6N	250		66		
GR300X7.6N	300		80		
GR370X7.6N	370		102		

Recommended tools are shown on page 228


GFH



Same features as G series.
Quick and easy identification of bundled conductors.
Write on panel with Felt tip pen.

CABLE TIES

GFH series, PA6.6 Polyamide

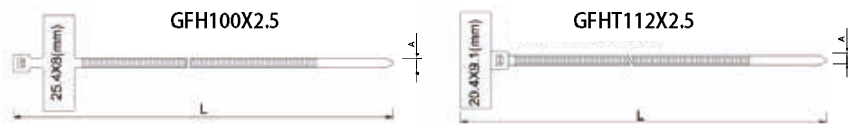

Markable cable ties in PA6.6

Type	L (mm)	A (mm)	Max. Bundle Ø (mm)	Min. Loop Tensile Strength (kg)	Quantity
GFH100X2.5	100	2,5	18	8,1	100
GFHT112X2.5	112				


Recommended tools are shown on page 228

The dimensions shown in the table must be considered as nominal. Cembre reserves the right to make changes without prior notice

1600



Resistant to: UV, salt atmosphere, oils, greases, oil products
Colour: Black



Cable Ties in PA12 Polyamide

Type	Head Type	L (mm)	A (mm)	Min. Bundle Ø (mm)	Max. Bundle Ø (mm)	Min. Loop Tensile Strength (kg)	Quantity
1618.90	singola	180	9	15	40	40	100
1626.90	doppia	260	9	30	60	55	100
1636.90	doppia	360	9	30	93	55	100
1651.90	doppia	510	9	70	140	55	100
1676.90	doppia	760	9	70	220	55	100

Recommended tools are shown on page 228

Material: Elastomerized Polymer on Polyamide base
Self-extinguishing HB (UL94)
Halogen free
Operating temperature:
From -45°C to +85°C (continuous)
From -45°C to +120°C (short periods)