

B-TC500Y


18.0 V CORDLESS HYDRAULIC CUTTING TOOL

overhead line application

MAIN APPLICATIONS

specifically designed to cut Copper, Aluminum, Aluminum-Steel cables (ACSR) having Ø max 50 mm

Not suitable for cutting stay wire, Steel rope or earthing rod

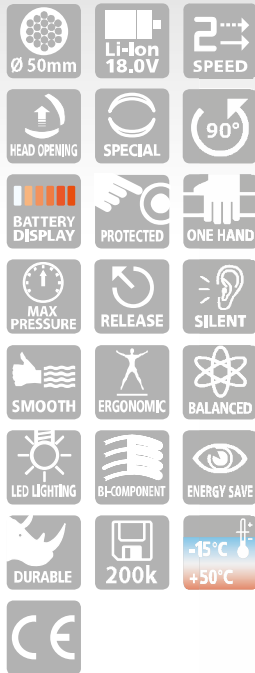

TECHNICAL FEATURES

| | |
|--------------------------|-------------|
| Max cutting Ø mm | 50 |
| Dimensions mm | |
| Length | 405 |
| Height | 398 |
| Width | 83 |
| Battery | 18.0V 4.0Ah |
| Weight kg (with Battery) | 5,8 |

STORAGE

| | |
|-------------------------|-----------------|
| Type | VAL-P40 |
| Dimensions mm L x W x H | 520 x 432 x 126 |
| Weight kg | 2,6 |
| Suž | ✓ |
| Purchase separately | - |



The tool is supplied as:

- Basic tool with battery and wrist strap
- Spare battery
- Battery charger
- USB cable
- Plastic carrying case suitable for storing the tool and accessories

Next generation of 18.0 V cordless hydraulic cutting tool specifically designed to cut Copper, Aluminum, Aluminum-Steel cables (ACSR) having a max overall diameter of 50 mm. The blades are manufactured from high strength special Steel, heat treated to ensure a long service life. New Li-Ion 18 V 4 Ah batteries offer a higher capacity than 14.4 V 3 Ah, while greater cutting speed and cutting force result from a revitalised hydraulic system with double speed action.

The battery is equipped with LED indicators to show the remaining battery life at any time by pressing the adjacent button.

The head can rotate through 90 degrees, to enable the operator to work in the most comfortable position, and can easily be opened to allow cutting of running cables.

Fitted with a maximum hydraulic pressure valve.

Designed with improved balance, B-TC500Y is easily manageable during the cutting process and, by the use of bi-component plastics, has a shell with high resistance to wear and damage.

Rubber grip inserts, low noise and minimal vibration aid operator comfort while additional convenience and safety are provided by LED lighting of the working area.

Operating temperature:
-15 to +50 °C