

## COMPRESSION CABLE GLANDS

Polyamide PA6

### 1700T



Material: POLYAMIDE PA6  
self-extinguishing class V0 (UL 94)  
Temperature range:  
-20°C to +90°C (continuous)  
Protection: IP 54  
Colour: RAL 7035 light grey,  
RAL 9005 black

### Pg thread DIN 40 430 - Dimensions DIN 46 320

Type Light Grey	P	Fixing Hole Ø (mm)	Ø A min-max (mm)	B1 Spanner Head (mm)	B2 Spanner Body (mm)	C (mm)	L min-max (mm)	Quantity Box/Bag
*1700T	Pg 9	15,5	6,5- 8,5	17	20	8	19-22	200/100
*1701T	Pg11	18,8	8 -10	19	22	8	21-25	100/100
*1702T	Pg13,5	20,5	8 -11	21	24	9	22-26	100/100


### reduced cable entry

Sealing ring: CHLOROPRENE, concentric, multi-sector

### Pg thread DIN 40 430 - Dimensions DIN 46 320

Type Light Grey	P	Fixing Hole Ø (mm)	Ø A min-max (mm)	B1 Spanner Head (mm)	B2 Spanner Body (mm)	C (mm)	L min-max (mm)	Quantity
1702CONC	Pg13,5	20,5	5,5-13	21	24	9	22-26	100

Add to Ref: N for Black

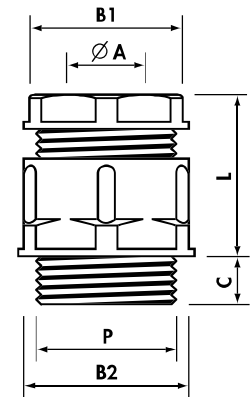

## POLYSTYRENE CABLE GLANDS

Polystyrene PS

### 1700P



Material: POLYSTYRENE PS  
Temperature range:  
-20°C to +60°C (continuous)  
Colour: RAL 7035 light grey,  
RAL 9005 black

Sealing ring: PVC 50 sh A - Protection: IP 54

### Pg thread DIN 40 430 - Dimensions DIN 46 320

Type Light Grey	P	Fixing Hole Ø (mm)	Ø A min-max (mm)	B1 Spanner Head (mm)	B2 Spanner Body (mm)	C (mm)	L min-max (mm)	Quantity Box/Bag
1700P	Pg9	15,5	7- 8,5	17	20	8	19-22	200/100
*1701P	Pg11	18,8	8 -10	19	22	8	21-25	100/100
*1702P	Pg13,5	20,5	8 -11	21	24	9	22-26	100/100
1703P	Pg16	22,6	11 -14	23	27	10	24-33	50/50
1704P	Pg21	28,5	14,5-18	30	33	11	25-32	50/25

\*Add to Ref: N for Black