

Water Hose – Straight Braided

- **Light and flexible**
- **Excellent resistance to oils, solvents, and both aqueous and non-aqueous solutions**
- **Long service life with outstanding aging qualities**

CEJN water hose is designed to be used with water but is also an excellent choice for compressed air in damp and wet environments. It has high impact strength and is functional in a wide temperature range. The hose easily springs back to its original form and has excellent abrasion resistance. The first layer of the hose consists of ether-based polyurethane, the second of polyester fiber and the third of ether-based polyurethane.




Size ID x OD

- 8 x 12 mm
- 11 x 16 mm



Hose material Ether-based PUR reinforced with polyester fiber

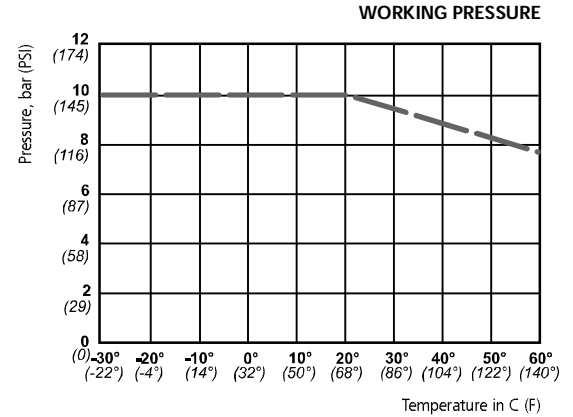

	ID x OD	Total length	Part No.	Max working pressure (20°C, 68°F)	Burst pressure (20°C, 68°F)
STRAIGHT BRAIDED	8 x 12 mm	50 m	19 958 1240	10 bar (145 PSI)	40 bar (580 PSI)
	11 x 16 mm	50 m	19 958 1640	10 bar (145 PSI)	40 bar (580 PSI)

CEJN reserves the right to make changes without further notification. Thread connections are listed according to ISO Standards. Other connections and sealing material on request. Check with an authorized CEJN distributor for availability and prices. Some part numbers may be subject to minimum order quantities. Please visit our website, www.cejn.com, for general maintenance tips.

